

MAXIFY GX6560

MegaTank


TECHNICAL SPECIFICATIONS



Canon

MAXIFY GX6560

MegaTank

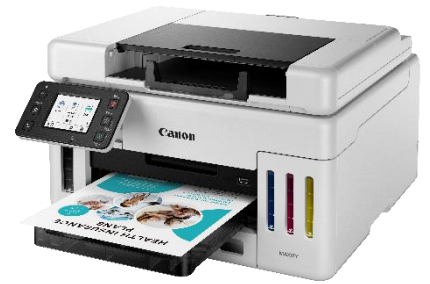

ENJOY ECONOMICAL HIGH-YIELD PRINTING

Equipped with Canon's new mega-sized tanks, the MAXIFY GX6560 MegaTank boasts printing yields of up to 6,000 B&W A4 prints and up to 14,000¹ colour prints per set of ink bottles, reducing the need to think about replacing your printer's ink as frequently. Economy Mode helps you get even more from your MegaTank printer, achieving up to 9,000 A4 B&W pages and up to 21,000 colour pages per set of ink bottles².



COMPACT PRACTICALITY

The MAXIFY GX6560 MegaTank offers the functionality of print, scan, and copy in a compact footprint ideal for budding entrepreneurs or a busy small office. Fully front operational this printer can fit into smaller spaces with no space needed on either side of the printer.



GET THE BENEFIT OF EASY MAINTENANCE

The MAXIFY GX6560 MegaTank is designed with a user-replaceable maintenance cartridge, ensuring your printer continues to run reliably day-to-day.



MEGA EFFICIENCY. SUPERCHARGED PRODUCTIVITY.

The MAXIFY GX6560 MegaTank printer can keep up with your high-volume demands, equipped with 35 sheet Auto Document Feeder and high-capacity front and rear paper feeding totalling 350 sheets of plain paper needed for those very productive environments.



¹Approx. yields are based on Canon original method using test patterns ISO/IEC 24712 (Colour chart). The estimated page yields are determined not based on the initial set of bundled ink bottles, but based on subsequent sets of ink bottles after print head nozzles have been filled with ink from the initial set of ink bottles. Black and colour page yields are not to be combined. Page yields varies significantly depending on contents printed and other factors.

²Economy mode plain paper Page Yield is an estimate.

What inks can I use with my printer?

GI-66BK
GI-66C
GI-66M
GI-66Y



MAXIFY GX6560



| SPECIFICATIONS

GENERAL FEATURES	
Model	MAXIFY GX6560 MegaTank
Ink Type	4 Bottles (PGBK / C / M / Y)
Maximum Print Resolution	600 dpi*1 x 1,200 dpi
Size	Approx. 399 x 645 x 327mm Approx. 15.8 x 25.4 x 12.9 inch
Weight	Approx. 11.5 kg Approx. 25.3 lbs
Display	2.7" / 6.7 cm LCD (Monochrome)
Interface	USB / Wireless
Input Power	AC 100-240 V, 50 / 60 Hz
PRINT SPEED	
Document: Colour*2	Approx. 15.5 ipm
Document: Black & White*2	Approx. 24.0 ipm
POWER CONSUMPTION	
OFF	Approx. 0.1 W
Standby (MFP: scanning lamp is off) USB connection to PC	Approx. 0.9 W
Standby (all ports connected, MFP: scanning lamp is off)	Approx. 1.4 W
Time to enter Standby mode	Approx. 5 min
ENVIRONMENT	
Operating Environment*5	Temperature: 5 - 35 °C Humidity: 10 - 90 %RH (no dew condensation)
Recommended Environment *6	Temperature: 15 -30 °C Humidity: 10 - 80 %RH (no dew condensation)
Storage Environment	Temperature: 0 - 40 °C Humidity: 5 - 95 %RH (no dew condensation)
ACOUSTIC NOISE (PC PRINT)	
Quiet Mode	Available
Acoustic Noise (PC print) Plain Paper*7	Approx. 49.0 dB(A)
PRINT HEAD / INK	
Number of Nozzles	Total 4,352 nozzles (BK: 1,280 nozzles, C/M/Y 1,024 nozzles)
Compatible Inks	GI-66BK, GI-66C, GI-66Y, GI-66M
PRINTABLE WIDTH	
	Up to 208 mm (8 inch)

PRINTABLE AREA

Bordered Printing

- #10 Envelope, DL Envelope, Envelope C5, Monarch Envelope
Top: 12.7 mm, Bottom: 12.7 mm, Right: 5.6 mm, Left: 5.6 mm
- Square(127 mm x 127 mm)
Top: 6 mm, Bottom: 6 mm, Right: 6 mm, Left: 6 mm
- Other
Top: 3 mm, Bottom: 5 mm, Right: 3.4 mm, Left: 3.4 mm
- Bordered Auto 2-sided printing
Top: 5 mm, Bottom: 5 mm, Right: 3.4 mm, Left: 3.4 mm

SUPPORT MEDIA

Rear Tray

Plain Paper (64 g/m² - 105 g/m²), High Resolution Paper (HR-101N), Photo Paper Plus Glossy II (PP-301), Photo Paper Pro Luster (LU-101), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701), Matte Photo Paper (MP-101), Envelope, Magnetic Photo Paper(MG-101), Restickable Photo Paper(RP-101), Light Fabric Iron on Transfers(LF-101), Double sided Matte Paper(MP-101D)

Cassette

Plain Paper (64 g/m² - 105 g/m²)

PAPER SIZE

Rear Tray

A4, A5, A6, B5, LTR, LGL, STMT, B-Oficio, M-Oficio, Foolscap, FS, Executive, #10 Envelope, DL Envelope, C5 Envelope, Monarch Envelope, 4" x 6", 5" x 7", 7" x 10", 8" x 10", Square (127 mm x 127 mm). Custom size (width: 89 mm - 216 mm, length: 127 mm - 1,200 mm)

Cassette

A4, A5, B5, LTR, Executive. Custom size: width 148 mm - 216 mm, length 210 mm - 297 mm

PAPER HANDLING (MAXIMUM NUMBER)

Rear Tray

Plain Paper (64 g/m²): 100
4" X 6" - Photo Paper Plus Glossy II (PP-301), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701), Matte Photo Paper (MP-101): 20
4" X 6" - Magnetic Photo Paper (MG-101), Restickable Photo Paper (RP-101): 1

Cassette

Plain Paper (64 g/m²): 250

Auto Document Feeder

Plain Paper (64 g/m²): 35 LGL: 5, others: 1

PAPER WEIGHT

Rear Tray

Plain Paper: 64 g/m² -105 g/m²,
Canon paper: max paper weight : approx. 265 g/m²,
Photo Paper Plus Glossy II (PP-301)

Cassette

Plain Paper: 64 g/m² -105 g/m²

MAXIFY GX6560

 MegaTank

| SPECIFICATIONS

SCANNER FUNCTIONS

Scanner Type	Flatbed (ADF / Platen)
Optical Resolution*4	1,200 x 1,200 dpi
Scanning Bit Depth (Input/Output)	Grayscale: 16 bit / 8 bit Colour: RGB each 16 bit / 8 bit
Maximum Document Size	A4 / LTR

COPY FUNCTIONS

Maximum Document Size	A4 / LTR
Compatible Media	Plain Paper (64 g/m2 - 105 g/m2), Photo Paper Plus Glossy II (PP-301), Photo Paper Pro Luster (LU-101), Photo Paper Plus Semi-gloss (SG-201), Photo Paper Glossy (GP-701), Matte Photo Paper (MP-101), Light Fabric Iron on Transfers (LF-101)
Image Quality	3 positions (Economy, Standard, High)
Multiple Copy	Black & White / Colour: max. 99 pages

PRINTING SOLUTION

Available for	AirPrint / Mopria / Canon Print Service (for Android) / PIXMA Cloud Link / Canon PRINT Inkjet/SELPHY (for iOS / Android)
Minimum System Requirements	Windows ^R 11, 10, 8.1, 7SP1. Windows Server 2022/2019/2016/2012 R2/2008 R2 SP1. macOS 10.15.7~13

What's in the Box?

Printer
Power Cord
Full set of Ink bottles
Getting started guide

Contents



USB cable not included.

*1: Ink droplets can be placed with a pitch of 1/4800 inch at minimum.

*2: Document print speeds are the averages of ESAT (Estimated Saturated Throughput) (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC

24734. Photo print speed is based on the default setting using ISO/JIS-SCID N2 on Photo Paper Plus Glossy II and does not take into account data processing time on

host computer. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.

*3: Paper types NOT supported for borderless printing are as follows: Envelope, High Resolution Paper, T-Shirt Transfer, Photo Stickers

*4: Optical resolution is a measure of maximum hardware sampling resolution, based on ISO 14473 standard.

*5: The performance of the printer may be reduced under certain temperature and humidity conditions.

*6: For the temperature and humidity conditions of papers such as photo paper, refer to the paper's packaging or the supplied instructions

*7: Acoustic Noise is measured based on ISO7779 standard with default setting.

Standard disclaimers:

- If your inkjet printer is found defective within the applicable manufacturer warranty period (1 Year), we'll replace it with the same, or an equivalent model. Excludes damage caused by external factors. Canon's full replacement promise is in addition to your rights under Australian Consumer Law which, depending on the type of fault, includes repair, replacement or a refund. For full terms see: www.canon.com.au/printassist or the card in the printer box. Only for products purchased at Authorised Canon Australia retailers

- Photo print speed is based on the default setting using ISO/JIS-SCID N2 on Photo Paper Plus Glossy II and does not take into account data processing time on host computer. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.

- Page yield of ink bottle used for initial setup is lower than a replacement as a certain amount of ink is used to fill the printhead during setup. Page yield is the estimated value based on Canon's individual test method using the ISO/IEC 24712 colour chart and continuous printing simulation with the replacement ink bottles after initial setup. Black and colour page yields are not to be combined. Page yield varies significantly depending on contents printed and other factors.

- USB cable not included.

Note: Ink must be available in each ink-tank for all functions including copy, print and scan. Some functions may not work unless an internet connection established.

Canon

**www.canon.com.au
www.canon.co.nz**