

# DocuPrint CM415 AP / M465 AP

## Think bigger. Go smaller



## Big performance doesn't have to come with big dimensions.

Fuji Xerox makes you rethink size with the DocuPrint CM415 AP / M465 AP. Compact yet fast and flexible, these two smart machines are set to bring productivity in your office to a new high!

## **Compact Performers**

#### Highly functional multifunction device

The DocuPrint CM415 AP / M465 AP are a compact print solution, delivering fast print speeds and exceptional colour and monochrome print quality, supporting copying, faxing and scanning and email.

#### Mobile and cloud connectivity

The DocuPrint CM415 AP / M465 AP offer support for mobile devices, allowing easy access to the device whether you are in or out of the office.

#### DocuPrint CM415 AP



DocuPrint M465 AP

Сору

Print

Scan



Monochrome: 35 ppm Colour: 35 ppm

Monochrome: 40 ppm



Monochrome: 45 ppm

Monochrome: 40 ppm



## Productivity and Efficiency

#### Advanced document security

The built-in Authentication feature available on the DocuPrint CM415 AP / M465 AP adds secure document printing for up to 1,000 users. Documents can be sent to the device, where they are held in its


hard drive until you release the job by entering a password or pin code. For even greater efficiency, you can 'tap-and-go' to release the print job with a security swipe card by adding a built-in IC Card Reader^ to the device.



IC Card authentication can also provide access control to specific functions on the device, enhancing both security management and user convenience.

This is critical in environments where multiple users have access to the same device, and where confidential documents could fall into the wrong hands.

^ Requires IC Card Reader Kit option

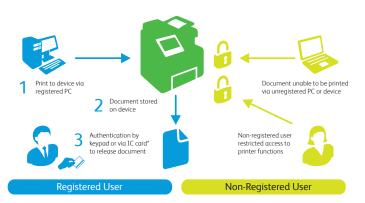

#### Take control of your print environment

The DocuPrint CM415 AP / M465 AP feature advanced reporting that can track and report every page that is printed on the device – by user, workgroup or department. By adding the optional Image Log Kit, you'll be able to automatically store every image that's ever been printed, scanned, copied or faxed to a third party server or folder. It's the ultimate safeguard if you require an audit trail for legal or security reasons.

Print limits can be assigned per user or group, including copies and scans. This not only gives you complete control over your print costs, but also gives you total visibility of your print environment.



## Intuitive 7-inch touch panel with Flick/Drag operation

The DocuPrint CM415 AP / M465 AP are equipped with an easy-to-use, 7-inch touch screen that supports flick/drag operations, allowing for intuitive, easy operation. The menu is customisable, allowing the user to tailor menu items to common work functions, increasing productivity.

#### Powerful Document Handling via DocuWorks\*

DocuWorks is a document handling software that integrates with the DocuPrint CM415 AP / M465 AP. It allows you to manage and share information by seamlessly handling, searching and editing electronic documents created with various applications (Microsoft Office, PDF, etc) and paper documents imported from scanners.

Furthermore, when integrated with Working Folder\* – Fuji Xerox's cloud service, you can securely access your information on the go through an internet enabled device.

\* Optional

#### **Create Searchable PDF Documents**

With the optional Searchable PDF Kit you can convert paper based documents into searchable PDF documents.

Perfect for archiving, your documents can be stored electronically, saving on bulky storage space and time consuming document handling. And as the documents are now 'searchable', retrieval of information is quick and easy.

#### Automate complex processes with a touch of a button

The manual processing of paperwork in business is costly in terms of time and resources. The DocuPrint CM415 AP / M465 AP can automate these manual processes by customising the control panel to your specific requirement.

If you regularly scan and email documents to certain people or workgroups, you can set up a specific icon on the control panel to do this automatically. For example, if you want to scan a document and save it to a network folder, and at the same time email it to a certain address, plus make 3 copies of it, then this can be automated through a press of a single button. If you want to turn a complex document into a searchable pdf, store it in a network directory for retrieval, and compress the large file before emailing, then this too can be achieved via a one-touch operation.

By eliminating manual processes many organisations, large and small, can achieve increased staff productivity, minimised risk of errors, improved office communication, and reduced overall cost of document-handling.

### Eco-friendly

#### EA-Eco toner reduces power consumption

Our EA-Eco Toner with low-melt technology achieves minimum fusing temperature at 20°C less than conventional toner for significant energy savings.

#### **Excellent TEC Value**

The DocuPrint CM415 AP / M465 AP conform to the International Energy Star Program standards for reducing power consumption.



#### **Remote Power off**

Devices located at a distance may be switched off remotely via PC. In large facilities such as a campus or factory building, this feature can reduce the time and labour required to manage remote devices.

#### Other convenient features

- Duplex Auto Document Feeder Copying and scanning is fast and efficient thanks to the Duplex Automatic Document Feeder
- 7-inch Colour Touch Screen Interface
- 3 150 sheet Mutipurpose tray
- 4 550 sheet input tray
- One tray module\* 550 sheet tray

(Extra two tray module available only on the DocuPrint M465 AP)

6 Cabinet\*

\* Optional



#### Specifications DocuPrint CM415 AP / M465 AP

#### **Basic Specifications / Copy Function**

|                       |                     | DocuPrint M465 AP  | DocuPrint CM415 AP   |  |
|-----------------------|---------------------|--|--|--|
| Item                  |                     | Description  |  |  |
| Туре                  |                     | Desktop  |  |  |
| Memory Capacity       |                     | 4 GB (Max.4 GB)  |  |  |
| Hard Disk Capacity *1 |                     | 160 GB or larger (Used space: 128 GB)  |  |  |
| Colour Capability     |                     | Monochrome   | Full colour  |  |
| Copy Resolution       |                     | 600 × 400 dpi  |  |  |
| Printing Resolution   |                     | 1200 × 2400 dpi (Photo <sup>*2</sup> ), 600 × 600<br>dpi (Text/Text-Photo/Photo/Map)   | 600 x 600, 1200 x 1200   |  |
| Warm-up Time          |                     | 35 seconds or less (At room<br>temperature 23°C).<br>18 seconds or less if the main power is<br>on (At room temperature 23°C). | 35 seconds or less (At room<br>temperature 23°C).<br>20 seconds or less if the main power is<br>on (At room temperature 23°C). |  |
| Original Size         |                     | Maximum of Legal for both Sheet and Book   |  |  |
|                       | Max.                | A4, Legal' <sup>3</sup> [Legal when using Bypass Tray]   |  |  |
| Paper Size            | Min.                | A5 [Postcard(100 × 148), 3 × 5" (76 × 127 mm), when using Bypass Tray]   |  |  |
| rupei size            | Image Loss<br>Width | Lead Edge 4.0 mm, trail Edge 4.0 mm, Right & Left Edges 4.0mm  |  |  |
| Paper                 | Paper Tray          | 60 to 216 gsm  |  |  |
| Weight <sup>*4</sup>  | Bypass Tray         | 60 to 216 gsm  |  |  |

Monochrome: 8.6 seconds

| First Copy Output Time                |   | Monochrome: 5.0 seconds   | (A4 / Monochrome priority mode)<br>Colour: 10.0 seconds<br>(A4 / Colour priority mode)  |  |
|---------------------------------------|---|---|---|--|
| Reduce /<br>Enlarge                   | Same<br>Magnification                         | 1:1 +/- 2 %   |   |  |
|                                       | Reduce/<br>Enlarge<br>Presets                 | 50%, 70%, 81%, 86%, 115%, 122%, 141%, 200%  |   |  |
|                                       | Custom<br>Reduction/<br>Enlargement<br>Ratios | 25 to 400% (in 1% increments)   |   |  |
| Continuous Copy Speed <sup>5</sup>    |   | Monochrome: 45 ppm  | Monochrome: 35 ppm, Colour: 35 ppm  |  |
|                                       | Standard                                      | 550 sheets × 1 tray + Bypass Tray 150 sheets  | 550 sheets × 1 tray + Bypass Tray 150 sheets  |  |
| Paper Tray<br>Capacity *6             | Optional                                      | Sheet Feeder: 550 sheets  | Sheet Feeder: 550 sheets  |  |
| Capacity °                            | Max.  | 2350 sheets<br>(Standard + Sheet Feeder × 3 tray)   | 1250 sheets<br>(Standard + Sheet Feeder × 1 tray)   |  |
| Continuous Copy *7                    |   | 999 sheets  |   |  |
| Output Tray                           | Capacity *6                                   | 250 sheets  |   |  |
| Power Supply                          |   | AC220-240 V ± 10%, 6 A, 50 / 60 Hz  | AC220-240 V ± 10%, 5 A, 50 / 60 Hz  |  |
| Power Consumption<br>(AC230V +/- 10%) |   | 1.09 kW or less<br>Sleep Mode: 1.25 W or less<br>Low Power Mode: 18.43 W or less <sup>*8</sup><br>Ready Mode: 81.18 W or less | 1.13 kW or less<br>Sleep Mode: 1.18 W or less<br>Low Power Mode: 22.31 W or less <sup>*8</sup><br>Ready Mode: 82.60 W or less |  |
| Dimensions                            |   | W 560 × D 541 × H 577 mm  | W 538 × D 553 × H 625 mm  |  |
| Weight <sup>*5</sup>                  |   | 26 kg   | 37 kg   |  |

\*1: Not all of the hard disk capacity is actually available for users. \*2: When Image Enhancement processing is performed. \*3: The tray should be extended when legal size paper is placed on it. \*4: Use Fuji Xerox recommended paper. Documents may not be printed correctly depending on usage conditions. \*5: The speed may be reduced due to the image quality adjustment. \*6: 80 gsm paper. 77: Copy process may stop temporarily for stabilisation of image quality. \*8: Low Power Mode is not set at the time of shipment from the factory. \*9: Including Toner Cartridge.

#### **Print Function**

| Item                      |  | Description   |   |  |
|---------------------------|--|---|---|--|
| Page Description Language |  | Standard: PCL5 / PCL6 Optional: Adobe® PostScript® 3 <sup>™</sup>   |   |  |
|                           | PCL 6<br>(Standard)  | Windows Server <sup>®</sup> 2003 (32bit), Windows Vista <sup>®</sup> (32bit),       Windows Server <sup>®</sup> 2008 (32bit), Windows <sup>®</sup> 7 (32bit),       Windows <sup>®</sup> 8 (32bit), Windows <sup>®</sup> 8 (1 (32bit),       Windows <sup>®</sup> 8 (32bit), Windows <sup>®</sup> 8 (1 (32bit),       Windows <sup>®</sup> 8 (32bit), Windows <sup>®</sup> 8 (1 (32bit),       Windows <sup>®</sup> 8 (42bit),       Windows <sup>®</sup> 8 (42bit), <td>Windows Server<sup>®</sup> 2003 (22bit), Windows Votal<sup>®</sup> (22bit),       Windows Server<sup>®</sup> 2008 (22bit), Windows<sup>®</sup> 7 (22bit),       Windows<sup>®</sup> 8 (32bit), Windows<sup>®</sup> 8 1 (32bit), Windows Server<sup>®</sup>       2003 (64bit), Windows Vista<sup>®</sup> (64bit), Windows Server<sup>®</sup>       2008 (64bit), Windows Server<sup>®</sup>       2018 (64bit), Windows<sup>®</sup> 8 1 (64bit), Windows<sup>®</sup> 7       (64bit), Windows<sup>®</sup> (64bit), Windows<sup>®</sup> 8 1 (64bit), Windows<sup>®</sup> 7</td>   | Windows Server <sup>®</sup> 2003 (22bit), Windows Votal <sup>®</sup> (22bit),       Windows Server <sup>®</sup> 2008 (22bit), Windows <sup>®</sup> 7 (22bit),       Windows <sup>®</sup> 8 (32bit), Windows <sup>®</sup> 8 1 (32bit), Windows Server <sup>®</sup> 2003 (64bit), Windows Vista <sup>®</sup> (64bit), Windows Server <sup>®</sup> 2008 (64bit), Windows Server <sup>®</sup> 2018 (64bit), Windows <sup>®</sup> 8 1 (64bit), Windows <sup>®</sup> 7       (64bit), Windows <sup>®</sup> (64bit), Windows <sup>®</sup> 8 1 (64bit), Windows <sup>®</sup> 7  |  |
| Operating                 |  | Mac OS X 10.5/10.6/10.7, OS X 10.8/10.9   |   |  |
| System <sup>2</sup>       | Adobe <sup>®</sup><br>PostScript <sup>®</sup><br>3 <sup>™</sup> Driver<br>(Optional) | Windows Server <sup>®</sup> 2003 (32bit), Windows Vista <sup>®</sup> (32bit),<br>Windows Server <sup>®</sup> 2008 (32bit), Windows <sup>®</sup> 7 (32bit),<br>Windows <sup>®</sup> 8 (32bit), Windows <sup>®</sup> 8 (12bit), Windows Server <sup>®</sup><br>2003 (64bit), Windows Vista <sup>®</sup> (64bit), Windows Server <sup>®</sup><br>2008 (64bit), Windows <sup>®</sup> 8 (64bit), Window <sup>®</sup> 8 (64bit), W | Windows Server <sup>®</sup> 2003 (22bit), Windows Yota <sup>®</sup> (22bit),       Windows Server <sup>®</sup> 2008 (22bit), Windows <sup>®</sup> 74 (22bit),       Windows Server <sup>®</sup> 2008 (22bit), Windows <sup>®</sup> 74 (22bit),       Windows Server <sup>®</sup> 2003 (24bit), Windows <sup>®</sup> 74 (24bit), Windows Server <sup>®</sup> 2003 (64bit), Windows Server <sup>®</sup> 2012 (24bit), Windows <sup>®</sup> 8 (44bit), W |  |
|                           |  | Mac OS X 10.5 / 10.6 / 10.7 , OS X 10.8 / 10.9  |   |  |
| Emulation                 |  | ESC / P-K (LQ1900K II), TIFF, PEG, PDF, HP-GL (HP7586B), HP-GL2 / RTL (HP Design Jet<br>750C Plus), DocuWorks, PCL5 / 6 (HP Color Laser Jet 5500), KSSM, KS5843, KS5895   |   |  |
| Interface                 | Standard   | Ethernet 100BASE-TX / 10BASE-T , USB2.0   |   |  |
| Intenuce                  | Optional   | Ethernet 1000BASE-T   |   |  |

"
The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document. "2: For the latest information on the supported operating systems, please refer to our official website. Note: WSD stands for Web Services on Devices. Note: XPS stands for XML Paper Specification.

#### Notes

Notes 1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.

2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured. 3) The product specifications, appearance and other details in this catalog are subject to change without notice for improvements.

Other company names or product names are registered trademarks or trademarks of each company.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

For more information or detailed product specification, please call or visit us at

#### Fuji Xerox Asia Pacific Pte Ltd

14a Rodborough Road Frenchs Forest NSW 2086 Australia 1300 793 769 New Zealand 0800 993 769 www.fujixeroxprinters.com.au www.fujixeroxprinters.co.nz

#### Scan Function

| Item                                  |  | Description   |  |
|---------------------------------------|--|---|--|
| Туре                                  |  | Colour Scanner  |  |
| Scan Resolution                       |  | 600 × 600 dpi, 400 × 400 dpi, 300 × 300 dpi, 200 × 200 dpi                                |  |
| Scanning Duplex<br>Speed *1 Automatic |  | Monochrome: 40 ppm; Colour: 20 ppm<br>[Fuji Xerox standard paper (A4), 200dpi, to Folder] |  |

#### \*1: The scanning speed varies depending on the docur

#### **Fax Function**

| Item  | Description   |  |
|---|---|--|
| Original Size   | Max : A4, Legal   |  |
| Recording Paper Size  | Max: A4, Legal, Min: A5   |  |
| Transmission Time   | 2 seconds and more but fewer than 3 seconds "1                            |  |
| Transmission Mode   | ITU-T G3  |  |
| Scanning Resolution   | 600 × 600 dpi, 400 × 400 dpi, 200 × 200 dpi, 200 × 100 dpi                |  |
| Transmission Speed  | G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps |  |
| Applicable Lines  | Telephone subscriber line, PBX, Fax communication (PSTN), Max. 1 port     |  |
| 11 When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 × 3.85 lines/mm) and in high-speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. |   |  |

#### Duplex Automatic Document Feeder

| Item                            | Description   |
|---------------------------------|---|
| Original Size /<br>Paper Weight | Max. : A4, Legal; Min: A5 <sup>-1</sup><br>50 to 125 gsm (In Duplex: 60 to 125 gsm) |
| Capacity <sup>2</sup>           | 60 Sheets   |
| Feeding Speed (A4 Simplex)      | Monochrome: 40ppm, Colour: 20ppm  |

\*1: 139.7× 139.7 mm for non-standard paper size. \*2: 64gsm paper

#### Accessories

|   | DocuPrint M465 AP | DocuPrint CM415 AP |
|---|-------------------|--------------------|
| Item  | Code              | Code               |
| 550 Sheet Feeder                              | EC102823          | EC102803           |
| Cabinet                                       | EC102786          | EC102786           |
| Stand Skateboard                              | EC102787          | EC102787           |
| Embedded IC Card Reader                       | EC102893          | EC102893           |
| Omnikey External Card<br>Reader <sup>+1</sup> | 800L06481         | 800L06481          |
| Annotation Copy Kit                           | EC102840          | EC102807           |
| Network Accounting Kit                        | EC102904          | EC102894           |
| External Access Kit                           | EC102905          | EC102895           |
| USB Memory Kit                                | EC102843          | EC102810           |
| Gigabit Ethernet                              | EC102906          | EC102896           |
| Adobe PostScript 3 Kit                        | EC102907          | EC102897           |
| TC/SC Additional Font<br>ROM Kit              | EC102908          | EC102898           |
| Server Fax Kit                                | EC102909          | EC102899           |
| High Compression<br>Image Kit                 | EC102848          | EC102815           |
| Searchable PDF/DW                             | EC102849          | EC102816           |
| Copy Management<br>Expansion Kit              | EC102910          | EC102900           |
| Image Log Kit                                 | EC102911          | EC102901           |
| Image Log Kit (Adobe<br>PostScript)           | EC102912          | EC102902           |

\*1: Supports HID. Requires USB kit

#### Consumables

| Item                    | Code                          | Code            |
|-------------------------|-------------------------------|-----------------|
| Toner Cartridge (K)*1   | CT202373 (25k) CT202372 (10k) | CT202352 (11k)  |
| Toner Cartridge (Y)*1   | -                             | CT202353 (11k)  |
| Toner Cartridge (M)*1   | -                             | CT202354 (11k)  |
| Toner Cartridge (C)*1   | -                             | CT202355 (11k)  |
| Drum Cartridge*1        | CT351069 (85k)                | CT351066 (60k)  |
| Fusing Unit 220V*1      | -                             | EC102822 (30k)  |
| Waste Toner Cartridge*1 | -                             | EL500268 (100k) |
| Maintenance Kit*1       | EC102854 (200k)               | EL500267 (200k) |
| Feed Roll Kit*1         | EC102856 (100k)               | -               |

\*1: Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and



